



DISPLACEMENT PIGS

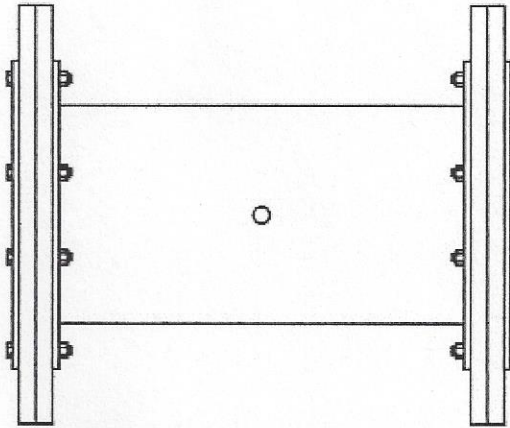

BGD-2

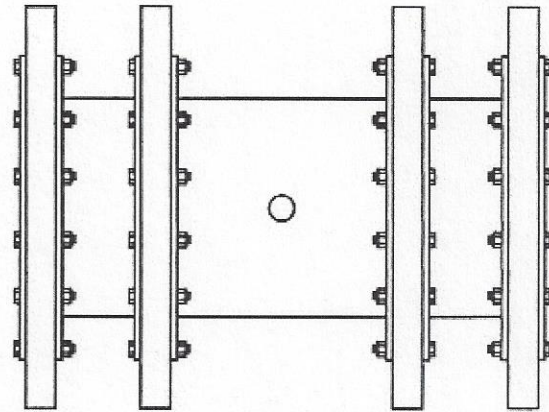

BGD-4

SIZE	LENGTH	WEIGHT	VOLUME
2"	2.5"	3	.01
3"	3.5"	5	.02
4"	4.5"	7	.04
6"	8"	10	.17
8"	10"	25	.37
10"	12"	40	.69
12"	15"	50	1.25
14"	16"	55	1.81
16"	19"	85	2.81
18"	21"	105	3.94
20"	23"	140	5.32
22"	24"	160	6.72
24"	26"	200	8.67
30"	32"	250	16.67
36"	38"	450	28.50
42"	44"	725	44.92
48"	52"	1350	69.33

SIZE	LENGTH	WEIGHT	VOLUME
2"	4"	4	.01
3"	5"	6	.03
4"	6.5"	8	.06
6"	10"	15	.21
8"	12"	30	.44
10"	14"	55	.81
12"	16"	85	1.33
14"	18"	90	2.04
16"	20"	140	2.96
18"	22"	165	4.13
20"	24"	200	5.56
22"	25"	235	7.00
24"	26"	325	8.67
30"	34"	570	17.71
36"	42"	790	31.50
42"	48"	1180	49.00
48"	54"	1450	72.00

SPECIFICATIONS: Sturdy carbon-steel body equipped with easily replaceable discs.

APPLICATIONS: Primarily used for evacuating air and liquid before and after hydrostatic testing, routine batching, or any pigging operation that may require reversing pigging direction. Effective sealing pig when batching varying grades of product.

OPTIONS: Neoprene or urethane discs; two-disc or four-disc pig design.

email: sales@pigsunlimited.com

23802 FM 2978, Suite C-1 • Tomball, TX 77375 • Tel: 281-351-2749 • Fax: 281-351-4658 • Toll-free: 800-578-7436

www.pigsunlimited.com